NOTES:

1. PIPING FOR 3" AND LARGER METERS SHALL BE DI.
2. INSTALLATION MUST ALLOW FOR FULL ACCESS TO METER AND VALVES, AND PROVIDE PROTECTION FROM FREEZING, WITH MIN 2 FT CLEARANCE TO WALL.
3. MIN DISTANCE FROM METER TO BYPASS LINE IS 2'-6"
4. A FLOOR DRAIN WITHIN 10 FT OF THE METER INSTALLATION IS REQD.
5. ALL VALVES TO BE NON-RISING STEM, RH OPEN.
6. A CHECK VALVE IS REQD IN ALL INSTALLATIONS UNLESS A BACKFLOW PREVENTION DEVICE IS INSTALLED.
7. ALL METERS MUST BE FURNISHED WITH ELECTRONIC DIGITAL ENCODER REGISTERS OR MECHANICALLY ENCODED REGISTERS, AND WITH AN ITRON REMOTE ERT FOR EACH REGISTER.
8. ERTS WILL BE INSTALLED AT A LOCATION DETERMINED BY DENVER WATER AT TIME OF METER INSPECTION. IN MOST CASES, ERTS WILL BE INSTALLED ON THE OUTSIDE OF THE BUILDING FACING A PUBLIC STREET. IF ERTS ARE MORE THAN 20 FT FROM METER LOCATION, OWNER MUST PROVIDE CONDUIT AND SIGNAL WIRE FROM METER TO ERT LOCATION. (SEE SHEET 53 FOR DETAIL OF CONDUIT AND OUTSIDE ERT MOUNTING).
9. INSIDE METER SETTINGS ARE PERMITTED ONLY WHEN THE TOTAL LENGTH OF SERVICE PIPE FROM MAIN TO METER SETTING DOES NOT EXCEED 60 FT.
10. ALL FITTINGS ARE TO BE FLANGED.

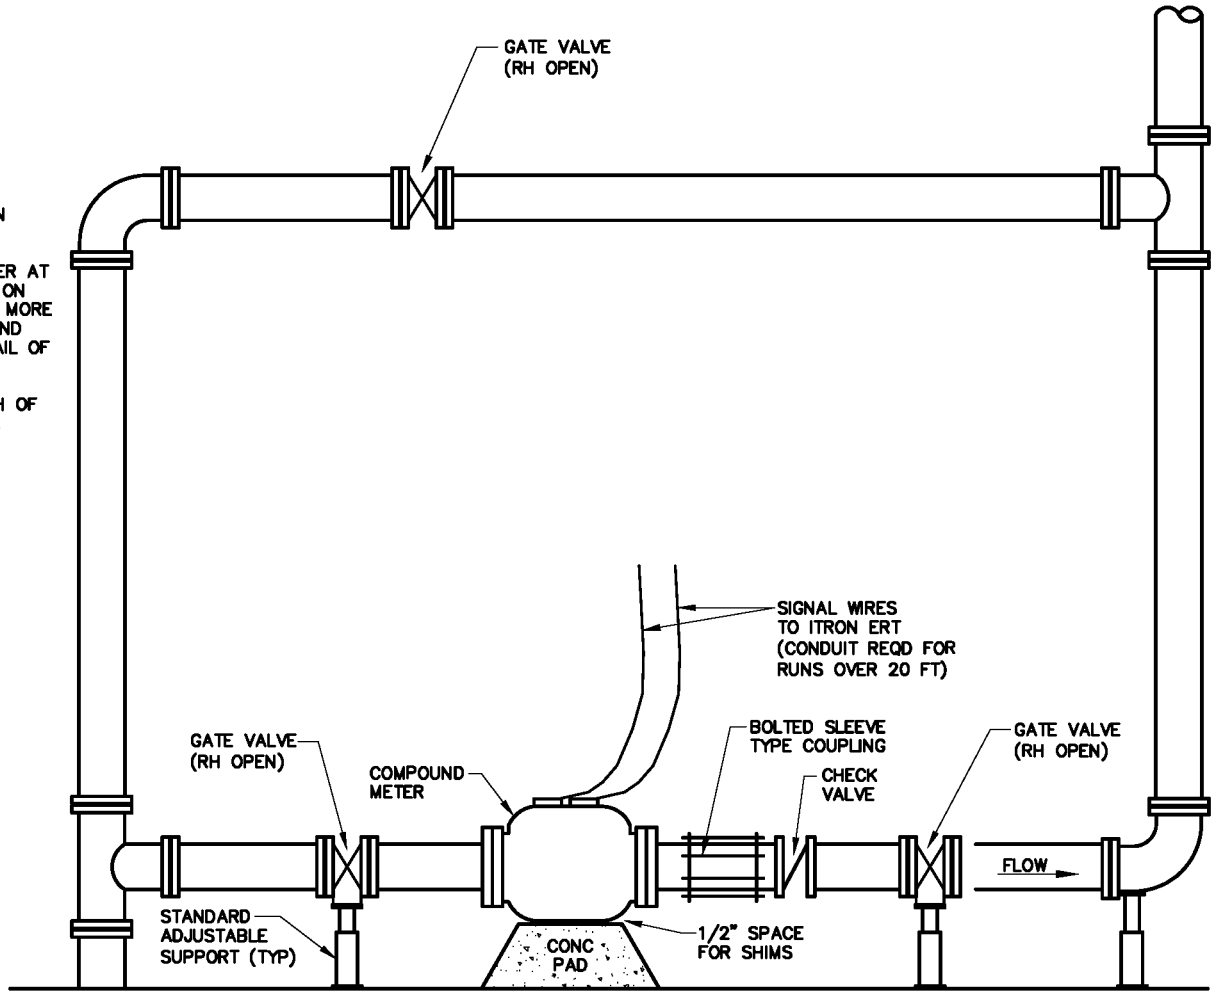

DENVER WATER
1600 West 12th Avenue • Denver, Colorado 80204
Phone(303)628-6000 • Telecopier No.(303)628-6851

INSIDE SETTING FOR 3" AND LARGER COMPOUND METER

Scale: NONE | Date: DECEMBER 1998

Drawn: C.B.B. | Tr: | Ck:

Approved: | Dr. 127 | No. 35